

DESCRIPTION

Siemens convector heaters are a compact, panel heater designed for domestic and commercial use. Its ultra-efficient and unobtrusive design creates a safe, lower surface temperature. The Compact range incorporates an exclusive metal filament element with large airflow design resulting in quiet and quick response. The air outlet is sited on the front panel of the heater for better heat distribution and less heat loss. They are more efficient to run than conventional heaters due to the use of in-built electronic thermostats that sample the air every 40 seconds ensuring close control to the set temperature (accurate to within 0.5°C). 2 year manufacturers warranty.

APPLICATION

Wall mounted panel heater suitable for both domestic and commercial use.

COMPLIANCES




- IEC 60335-1
- IEC 60335-2.30

CONSTRUCTION

- Metal filament type element.
- Electronic thermostat with a range from 5° to 30°C, and accurate to within 0.5°C of the set temperature.
- Double pole rocker switch with red LED indicator.
- Thermal overheat protection cut-out with automatic reset.
- Powder coated metal body.
- Colour - RAL 9001 Warm White, Grill colour - RAL 7032 Grey.
- Three core flex with plug (2500W & 3000W have 15 Amp plug).
- 220 - 240V, 50Hz.
- IP21 drip proof protection category.



Model	Power (W)	Width (mm)	Height (mm)	Depth (mm)	Bracket Centres (mm)	Minimum Height from Floor (mm)	Mass (kg)
2NC2 905 1L	500	376	425	100	190	100	3.4
2NC2 910 1L	1000	466	425	100	280	100	4.0
2NC2 915 1L	1500	646	425	100	460	100	5.4
2NC2 920 1L	2000	826	425	100	640	100	6.8
2NC2 925 1L	2500	1006	425	100	820	100	8.0
2NC2 930 1L	3000	1186	425	100	1000	100	9.2

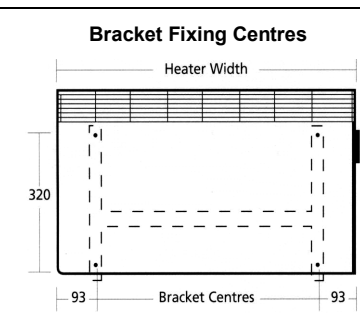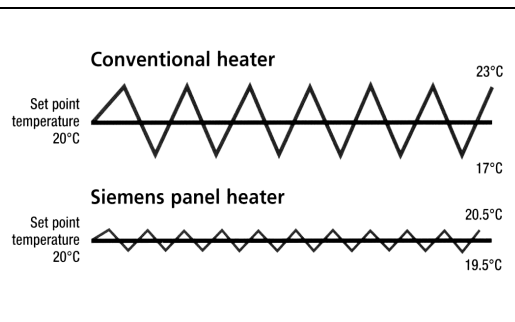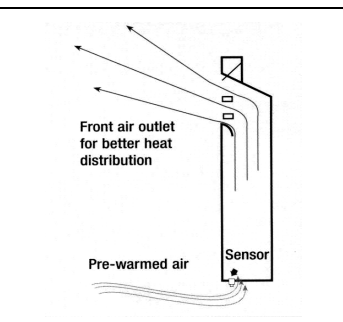

INSTALLATION

- The heater is fixed to the wall using the supplied mounting bracket. The outer carton is specially marked for use as a template, to assist positioning on the wall.
- The flex can pass through either side of the mounting bracket.
- Ensure a minimum clearance of 100mm is maintained from the floor and any flammable objects such as curtains, and upholstered furniture.

ACCESSORIES

- 2NC9 710 - Tamperproof Cover.
- 2NC9 713-2 - Electronic Energy Saver.
- The use of a 3 core + earth cable, in conjunction with a timer, will enable the inbuilt setback feature (temperature lowered by 5°C from the set point temperature) to be utilised.

ENERSAVE Products Limited

NEW ZEALAND ◦ PO Box 8867, CHRISTCHURCH ◦ Free Phone/Fax : 0800 508 509 ◦ Email : info@enersave.co.nz ◦ www.enersave.co.nz
 AUSTRALIA ◦ Unit 107/45 Gilby Road, Mount Waverley, VICTORIA 3149 ◦ Phone 61 3 9558 8211 ◦ Fax 61 3 9558 8222 ◦ ARBN 093 247 413