

DESCRIPTION

Siemens Unique is a slimline, intelligent and innovative wall mounted convector heater designed for domestic and commercial use. They are easy to install and operate. The unique digital electronic thermostat, with drift compensation, ensures a very stable room temperature. The back plate design and air-outlet grill in the front plate ensures good heat distribution and reduces loss through walls and windows when placed underneath. The heater has a double pole on/off switch, with a red LED that indicates when the heating element is energised. Overheat protection is included with an automatic reset. 2 year manufacturers warranty.

APPLICATION

Wall mounted panel heater suitable for both domestic and commercial use.

COMPLIANCES

- IEC 60335-1
- IEC 60335-2.30


CONSTRUCTION

- Metal filament finned type element.
- Electronic thermostat with a range from 5° to 30°C, and accurate to within 0.5°C of the set temperature.
- Double pole rocker switch with red LED indicator.
- Thermal overheat protection cut-out with automatic reset.
- Powder coated metal body.
- Colour - RAL 9010 White.
- Three core flex with plug.
- 220 - 240V, 50Hz.
- IP21 drip proof protection category.



Model	Power (W)	Width (mm)	Height (mm)	Depth (mm)	Bracket Centres (mm)	Minimum Height from Floor (mm)	Mass (kg)
2NC8 062 4L	600	555	400	80	280	100	4.3
2NC8 102 4L	1000	735	400	80	460	100	5.5
2NC8 152 4L	1500	1095	400	80	820	100	8.4
2NC8 202 4L	2000	1365	400	80	1090	100	10.4

Bracket Fixing Centres

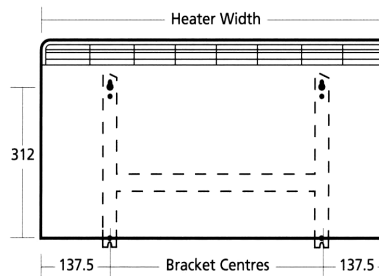

INSTALLATION

- The heater is fixed to the wall using the supplied mounting bracket.
- The flex can pass through either side of the mounting bracket.
- Ensure a minimum clearance of 100mm is maintained from the floor and any flammable objects such as curtains, and upholstered furniture.

ACCESSORIES

- 2NC9 810 - Tamperproof Cover
- 2NC9 811 - Pair of Stands
- 2NC9 813 - Variable Setback Plug
- 2NC9 812 - Autosaver
- 2NC9 814 - Manual Setback Plug
- The use of a 3 Core + Earth cable, in conjunction with a timer, will enable the inbuilt setback feature (temperature lowered by 5°C from the set point temperature) to be utilised.

ENERSAVE Products Limited

NEW ZEALAND ◦ PO Box 8867, CHRISTCHURCH ◦ Free Phone/Fax : 0800 508 509 ◦ Email : info@enersave.co.nz ◦ www.enersave.co.nz
 AUSTRALIA ◦ Unit 107/45 Gilby Road, Mount Waverley, VICTORIA 3149 ◦ Phone 61 3 9558 8211 ◦ Fax 61 3 9558 8222 ◦ ARBN 093 247 413